



Standard RGB LED Neon Flex

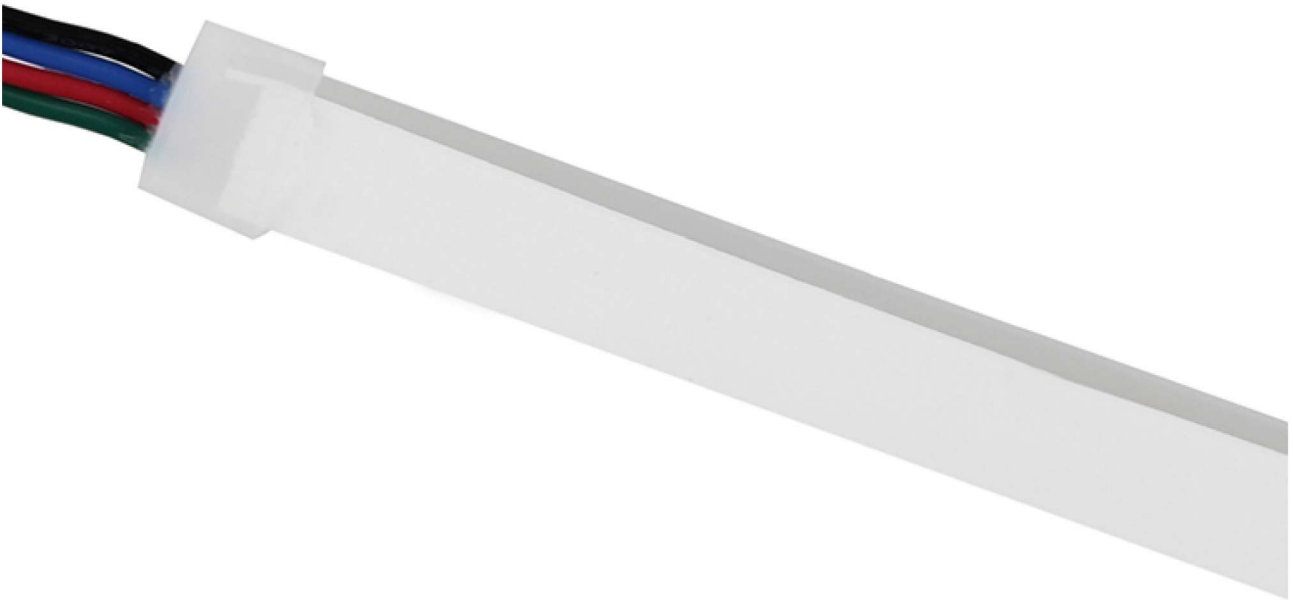

Product Description

This is a PWM control RGB color LED Neon flexible strip without Pixel. The whole body is made by silicon material. Fire resistance, Anti - UV, Anti - Corrosion and deformation resistance. Very soft and easy to be bend to make any small sign or LOGO. RGB led flex strip inside, side emitting and can only be bend side to side.

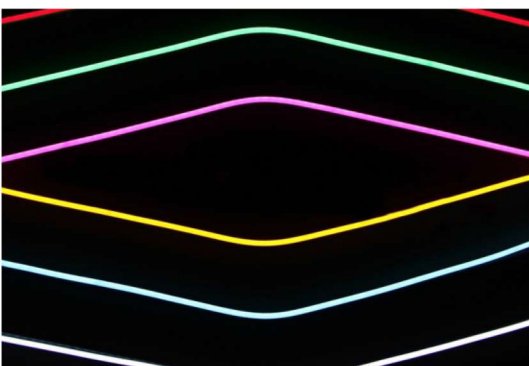

The cutting unit length is 31.3mm(12V), or 62.6mm(24V) per section

Cutting mark on the side of neon body

Waterproof IP68 Rated for outdoor installation


Including 10pcs mounting clips per reel(5M)

Customized measures

Product Datasheet


Product Number	WP006120TB3PZ	WP006120TC3PZ
LED Type	SMD LED RGB	
LED Quantity	120 leds/m	
Material	Silicon	
Bending Direction	Vertically	
CCT	RGB	
Cutting unit	31.3 MM	62.6 MM
Operating Voltage	DC12V	DC24V
Power (W)	14 W/M	14 W/M
Dimension	5000*6*12 MM	
IP	IP68	
Net Weight	0.4kg/roll (5m)	
Operation Temperature	- 40 ~ 50 °C	

Application

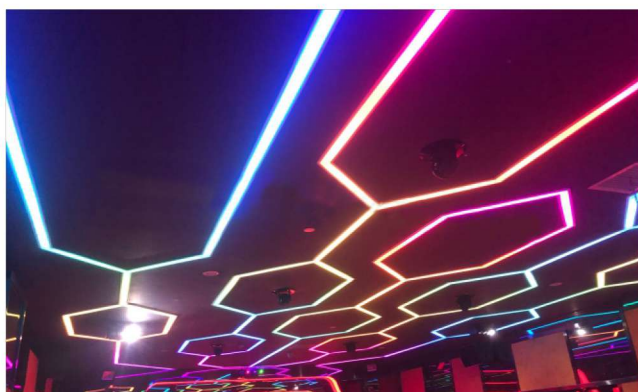

Hotels, restaurants, nights clubs.



Advertising signs, brightening.

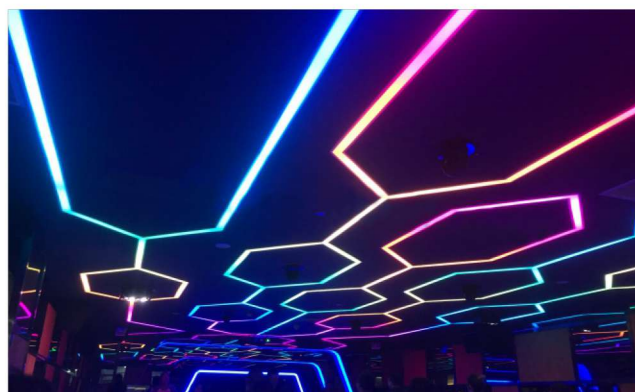


Back lighting, edge lighting.

Dancefloor background.


Correct bending way

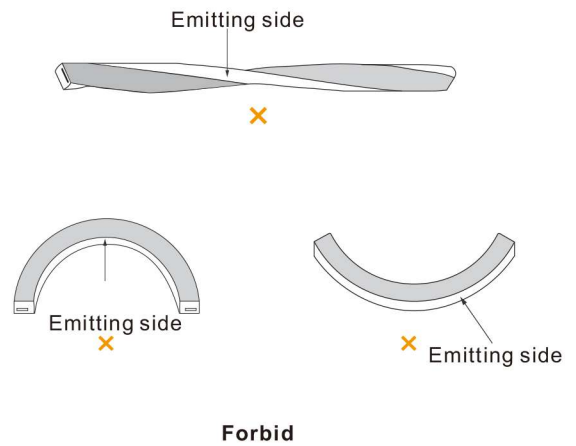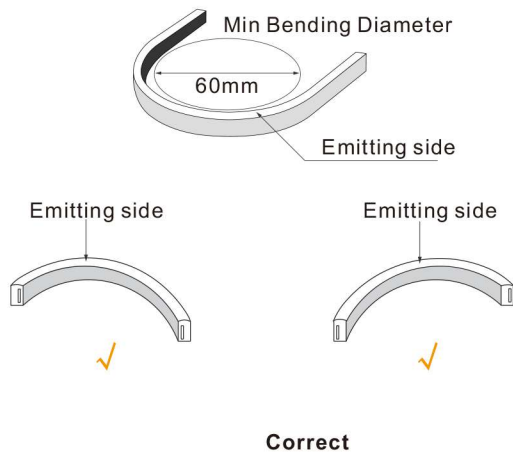

Correct bending

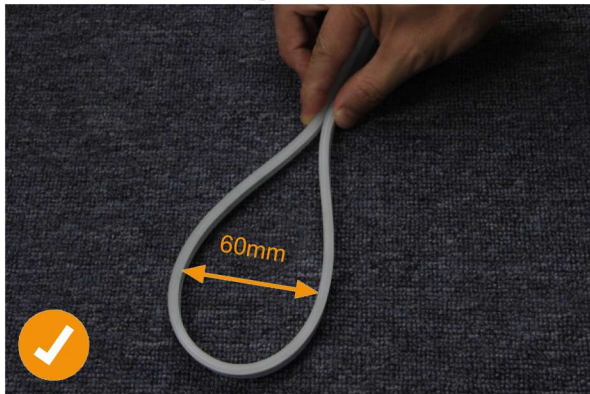

Face to the lighting surface and fold the strip.
The minimum bending diameter is 80mm

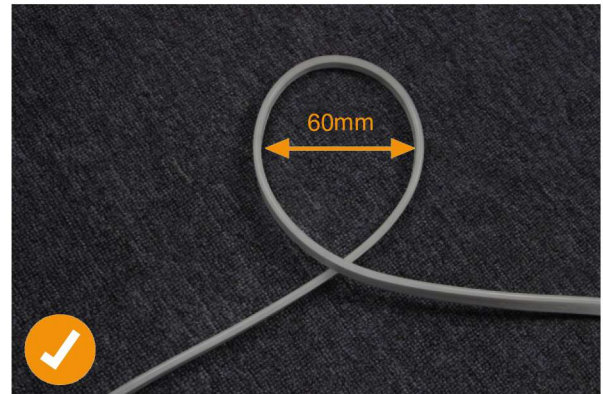

Lighting surface upwards and the strip can be bent to right or left naturally, The theminimum bending diameter is 100mm

Incorrect bending way



Face to the side surface(as the picture shows),
Do not bend it downward to damage the strip.



(as the picture shows) please do not twist the strip,
or it will be damaged


Installation






clips
50x8x13mm(LxWxH)

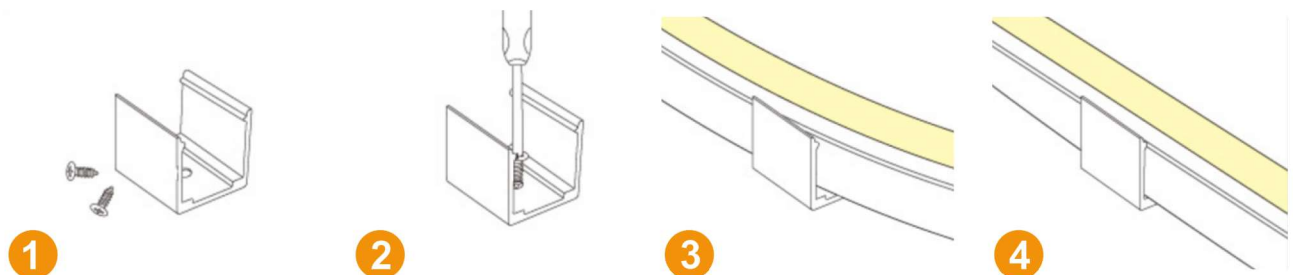


profile
1000x8x13mm(LxWxH)




Accessory(Excluded)

Name	Aluminum extrusion	End cap	Mount clip
installation			
Remarks	L:1000 mm		


Outline Dimension (unit:mm)

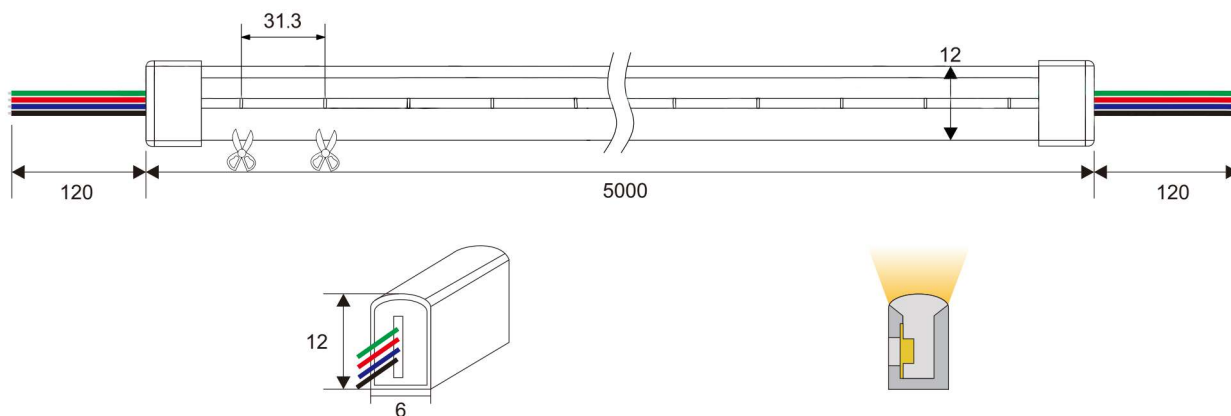

Connection

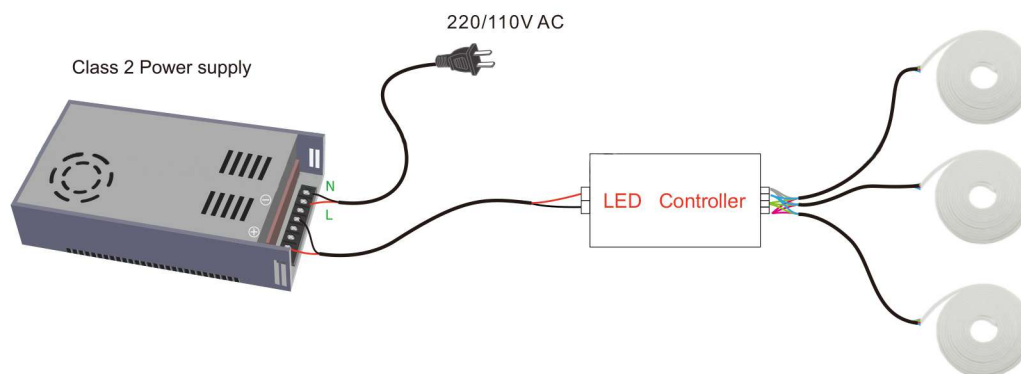

Product packaging

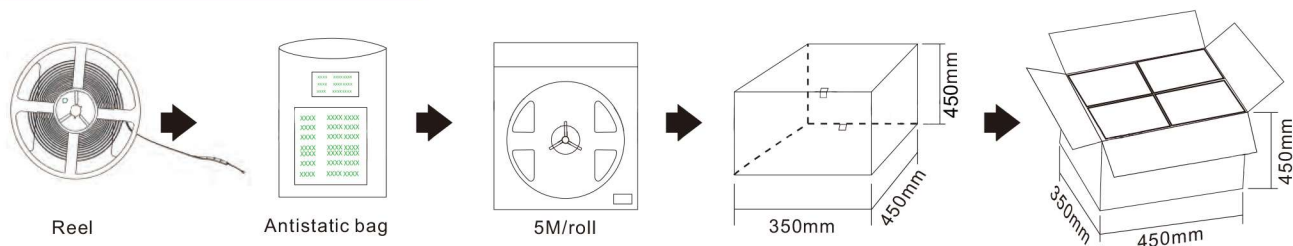

Product number	Standard length	Quantity / volume	outer carton size	Weight(kg)/reel
WP006120TB3LZ	5M Customized measures	240 Reels	L450xW350xH450mm	0.4kg
/				/
/				/
/				/
/				/
/				/